

vexia

portablet **CORE** **m**

SYSTEM UPDATE



Live a different experience!



1. Previous steps


1. First of all you need to have a **pendrive**.
2. **Download the zip and decompress** its content (the 101E folder).
Save it on the root USB: www.vexia.eu/descargas/101E.zip
3. **Connect your device** with the charger and keyboard.

2. Steps


1. **Introduce the USB flash drive** with the 101E folder into the USB Portabltet.
2. **Press at the same time the power button and the ESC button** on the keyboard until the next screen comes up.



3. Using the arrow keys on the keyboard, **go to the Boot Manager Option** and press Enter.




3. The next screen comes up:

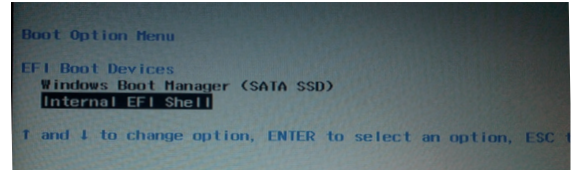

Select the **Internal Efi Shell** option and press Enter.

5. The next screen comes up :

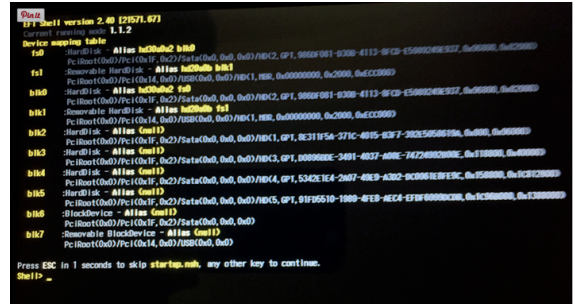


Write the following information where the line twinkle:

```
fs1: (and press Enter)
cd 101e ( and press Enter)
s ( and press Enter)
In order to write colon (: ) press Shift + ñ
```

- The equipment should start to upgrade the system and when it will be finished, it will automatically turn it off.
- Press at the same time the **power button** and the **ESC button** on the keyboard until the next screen comes up.



- Using the keyboard arrow keys **select the SFU option**.
- This image will come up. Please **confirm** that in the EC Ver line, it appears the updated version 10.1

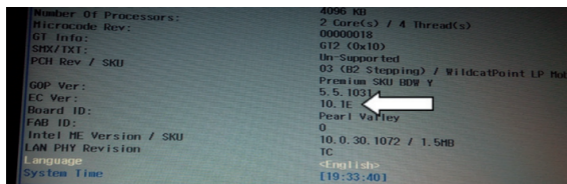

If this happens as described, the equipment has been correctly updated to the latest version. **Turn off your computer** using the power button pressing for 3 seconds.

NOTE: If the version displayed is different from the one mentioned proceeds to the steps again.